
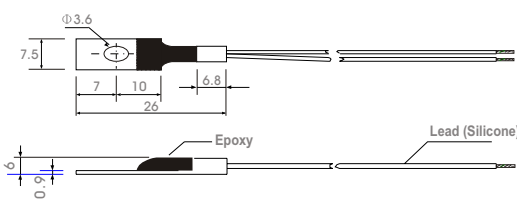
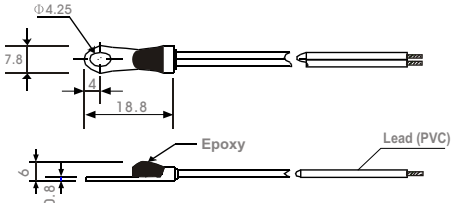
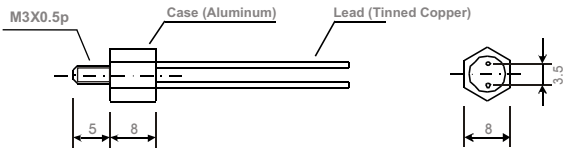


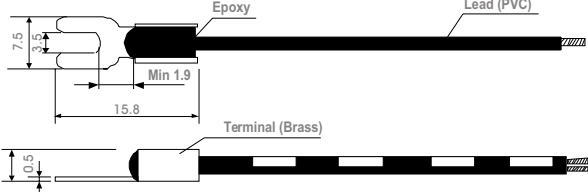

POWER SYSTEM

| | | |
|--|--|---|
| <p>1.QA Type(TSA for old series No.) Unit: mm</p>  | <p>Operating temp. range</p> <p>-20~+125°C</p> | |
| <p>Dielectric strength</p> <p>1500V AC for one sec</p> | | <p>Dissipation constant</p> <p>MIN. 6 mW/°C</p> |
| <p>Thermal time constant</p> <p>MAX.35 sec</p> | | <p>Moisture resistance</p> <p>(60°C 95% RH)×48hours</p> |
| <p>2.QB Type(TSC for old series No.) Unit: mm</p>  | <p>Operating temp. range</p> <p>-20~+85°C</p> | |
| <p>Dielectric strength</p> <p>1500V AC for one sec</p> | | <p>Dissipation constant</p> <p>MIN. 6 mW/°C</p> |
| <p>Thermal time constant</p> <p>MAX.35 sec</p> | | <p>Moisture resistance</p> <p>(60°C 95% RH)×48hours</p> |
| <p>3.QC Type(TSD for old series No.) Unit: mm</p>  | <p>Operating temp. range</p> <p>-20~+125°C</p> | |
| <p>Dielectric strength</p> <p>1500V AC for one sec</p> | | <p>Dissipation constant</p> <p>MIN. 10mW/°C</p> |
| <p>Thermal time constant</p> <p>MAX.50 sec</p> | | <p>Moisture resistance</p> <p>(60°C 95% RH)×48hours</p> |
| <p>4.QD Type Unit: mm</p>  | <p>Operating temp. range</p> <p>-20~+85°C</p> | |
| <p>Dielectric strength</p> <p>1500V AC for one sec</p> | | <p>Dissipation constant</p> <p>MIN.4 mW/°C</p> |
| <p>Thermal time constant</p> <p>MAX.35 sec</p> | | <p>Moisture resistance</p> <p>(40°C 95% RH)×1000hours</p> |