

## SMD Type 1500 W

### ■ Features

1. For surface mounted applications
2. RoHS compliant and halogen-free
3. Reliable low cost construction utilizing molded plastic technique
4. Glass passivated chip junction
5. Both bi-directional and uni-directional devices are available
6. Fast response time
7. Low leakage
8. Excellent clamping capability
9. 1500W peak pulse power capability with a 10/1000  $\mu$ s waveform, repetitive rate (duty cycle): 0.01%
10. High reliability application and automotive grade AEC Q101 qualified



### ■ Recommended Applications

1. Telecommunication
2. Computer
3. Industrial device
4. Consumer electronic device
5. Automotive

### ■ Mechanical Data

1. Case: DO-214AB (SMC), molded plastic meets UL flammability rating 94V-0
2. Terminal: Matte Tin-plated leads, solderable per MIL-STD-750, Method 2026
3. Polarity: The band denotes cathode (Note: no polarity indicator for bi-directional devices)

### ■ Part Number Code

T	P	S	M	C	J	5	.	0	C	A
1	2	3	4	5	6	7	8	9	10	11

THINKING Automotive Transient Voltage Suppression Diodes	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Product Series</th> </tr> <tr> <td style="width: 20%;">SMCJ</td> <td>THINKING Transient Voltage Suppression Diodes SMCJ Series</td> </tr> </table>	Product Series		SMCJ	THINKING Transient Voltage Suppression Diodes SMCJ Series	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Reverse Stand Off Voltage (<math>V_{RWM}</math>)</th> </tr> <tr> <td style="width: 20%;">5.0</td> <td>5V</td> </tr> <tr> <td>70</td> <td>70V</td> </tr> <tr> <td>120</td> <td>120V</td> </tr> </table>	Reverse Stand Off Voltage ( $V_{RWM}$ )		5.0	5V	70	70V	120	120V	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Type Code</th> </tr> <tr> <td style="width: 20%;">Blank</td> <td>Uni-directional, 10% <math>V_{BR}</math> Voltage Tolerance</td> </tr> <tr> <td>C</td> <td>Bi-directional, 10% <math>V_{BR}</math> Voltage Tolerance</td> </tr> <tr> <td>A</td> <td>Uni-directional, 5% <math>V_{BR}</math> Voltage Tolerance</td> </tr> <tr> <td>CA</td> <td>Bi-directional, 5% <math>V_{BR}</math> Voltage Tolerance</td> </tr> </table>	Type Code		Blank	Uni-directional, 10% $V_{BR}$ Voltage Tolerance	C	Bi-directional, 10% $V_{BR}$ Voltage Tolerance	A	Uni-directional, 5% $V_{BR}$ Voltage Tolerance	CA	Bi-directional, 5% $V_{BR}$ Voltage Tolerance
Product Series																									
SMCJ	THINKING Transient Voltage Suppression Diodes SMCJ Series																								
Reverse Stand Off Voltage ( $V_{RWM}$ )																									
5.0	5V																								
70	70V																								
120	120V																								
Type Code																									
Blank	Uni-directional, 10% $V_{BR}$ Voltage Tolerance																								
C	Bi-directional, 10% $V_{BR}$ Voltage Tolerance																								
A	Uni-directional, 5% $V_{BR}$ Voltage Tolerance																								
CA	Bi-directional, 5% $V_{BR}$ Voltage Tolerance																								


# Transient Voltage Suppression Diodes: TPSMCJ Series

## SMD Type 1500 W



### Structures and Dimensions

#### SMC-DO214AB

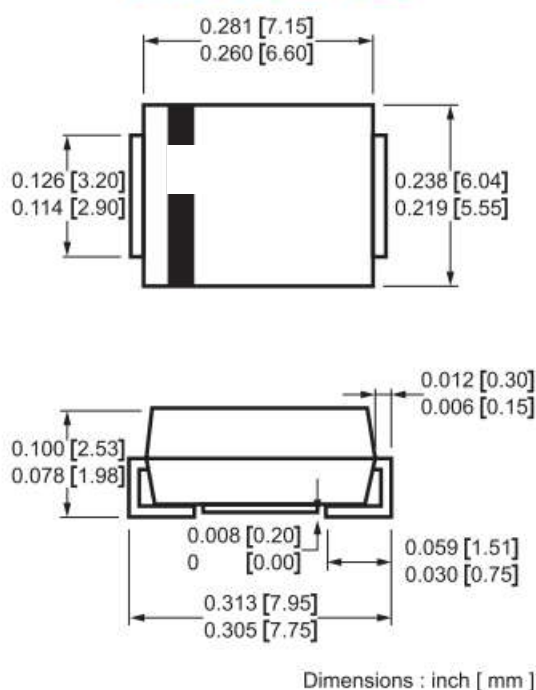

### Maximum Rating ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power dissipation at $T_A=25^\circ\text{C}$ by 10/1000 $\mu\text{s}$ waveform (Note1).	$P_{PPM}$	1500	W
Peak pulse current of on 10/1000 $\mu\text{s}$ waveform (Note1)	$I_{PPM}$	See Table	A
Peak forward surge current, 8.3ms single half sine wave on rated load (Note 2)	$I_{FSM}$	200	A
Power dissipation on infinite heatsink at $T_L=75^\circ\text{C}$	$P_{Dj}$	6.5	W
Operating junction and storage temperature range	$T_J, T_{STG}$	-55~+150	$^\circ\text{C}$

Note: 1. Please refer to Fig. 5 for non-repetitive current pulse, and Fig. 1 for derated above  $T_A = 25^\circ\text{C}$

2. 8.3ms single half sine-wave, or square wave that has a maximum of 4 pulses per minute.

# Transient Voltage Suppression Diodes: TPSMCJ Series



## SMD Type 1500 W

### ■ Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Part No. (Uni)	Part No. (Bi)	Reverse Stand off Voltage	Breakage Voltage VBR @ IT		Test Current IT( mA )	Maximum Clamping Voltage VC @ Ipp	Maximum Peak Pulse Current Ipp(A)	Maximum Reverse Leakage IR @VRWM	Marking Code	
			VRWM ( V )	Min( V )					Max( V )	UNI
TPSMCJ10A	TPSMCJ10CA	10	11.1	12.3	1	17	88.24	5	GDXA	BDXA
TPSMCJ11A	TPSMCJ11CA	11	12.2	13.5	1	18.2	82.42	1	GDZA	BDZA
TPSMCJ12A	TPSMCJ12CA	12	13.3	14.7	1	19.9	75.38	1	GEEA	BEEA
TPSMCJ13A	TPSMCJ13CA	13	14.4	15.9	1	21.5	69.77	1	GEGA	BEGA
TPSMCJ14A	TPSMCJ14CA	14	15.6	17.2	1	23.2	64.66	1	GEKA	BEKA
TPSMCJ15A	TPSMCJ15CA	15	16.7	18.5	1	24.4	61.48	1	GEMA	BEMA
TPSMCJ16A	TPSMCJ16CA	16	17.8	19.7	1	26	57.69	1	GEPA	BEPA
TPSMCJ17A	TPSMCJ17CA	17	18.9	20.9	1	27.6	54.35	1	GERA	BERA
TPSMCJ18A	TPSMCJ18CA	18	20	22.1	1	29.2	51.37	1	GETA	BETA
TPSMCJ19A	TPSMCJ19CA	19	21.1	23.3	1	30.8	48.73	1	GEBA	BEBA
TPSMCJ20A	TPSMCJ20CA	20	22.2	24.5	1	32.4	46.30	1	GEVA	BEVA
TPSMCJ22A	TPSMCJ22CA	22	24.4	26.9	1	35.5	42.25	1	GEXA	BEXA
TPSMCJ24A	TPSMCJ24CA	24	26.7	29.5	1	38.9	38.56	1	GEZA	BEZA
TPSMCJ26A	TPSMCJ26CA	26	28.9	31.9	1	42.1	35.63	1	GFEA	BFEA
TPSMCJ28A	TPSMCJ28CA	28	31.1	34.4	1	45.4	33.04	1	GFGA	BFGA
TPSMCJ30A	TPSMCJ30CA	30	33.3	36.8	1	48.4	30.99	1	GFKA	BFKA
TPSMCJ33A	TPSMCJ33CA	33	36.7	40.6	1	53.3	28.14	1	GFMA	BFMA
TPSMCJ36A	TPSMCJ36CA	36	40	44.2	1	58.1	25.82	1	GFPA	BFPA
TPSMCJ40A	TPSMCJ40CA	40	44.4	49.1	1	64.5	23.26	1	GFRA	BFRA
TPSMCJ43A	TPSMCJ43CA	43	47.8	52.8	1	69.4	21.61	1	GFTA	BFTA
TPSMCJ45A	TPSMCJ45CA	45	50	55.3	1	72.7	20.63	1	GFVA	BFVA
TPSMCJ48A	TPSMCJ48CA	48	53.3	58.9	1	77.4	19.38	1	GFXA	BFXA
TPSMCJ51A	TPSMCJ51CA	51	56.7	62.7	1	82.4	18.20	1	GFZA	BFZA
TPSMCJ54A	TPSMCJ54CA	54	60	66.3	1	87.1	17.22	1	GGEA	BGEA
TPSMCJ58A	TPSMCJ58CA	58	64.4	71.2	1	93.6	16.03	1	GGGA	BGGA
TPSMCJ60A	TPSMCJ60CA	60	66.7	73.7	1	96.8	15.50	1	GGKA	BGKA
TPSMCJ64A	TPSMCJ64CA	64	71.1	78.6	1	103	14.56	1	GGMA	BGMA
TPSMCJ70A	TPSMCJ70CA	70	77.8	86	1	113	13.27	1	GGPA	BGPA
TPSMCJ75A	TPSMCJ75CA	75	83.3	92.1	1	121	12.40	1	GGRA	BGRA
TPSMCJ78A	TPSMCJ78CA	78	86.7	95.8	1	126	11.90	1	GGTA	BGTA

Note: 1. Add suffix "C" or "CA" after part number to specify Bi-directional devices.

2. For bidirectional type having  $V_{RWM}$  of 10 volts and under, the  $I_R$  limit is doubled.

## SMD Type 1500 W

### ■ Rate and Characteristic Curve ( $T_A=25^\circ\text{C}$ unless otherwise noted)

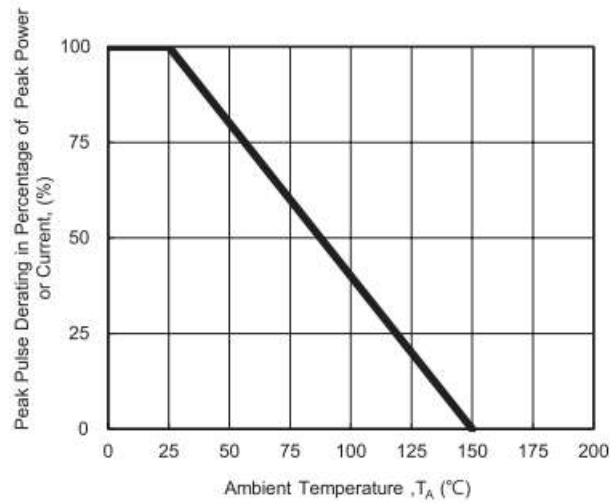


Fig. 1 - Pulse Derating Curve

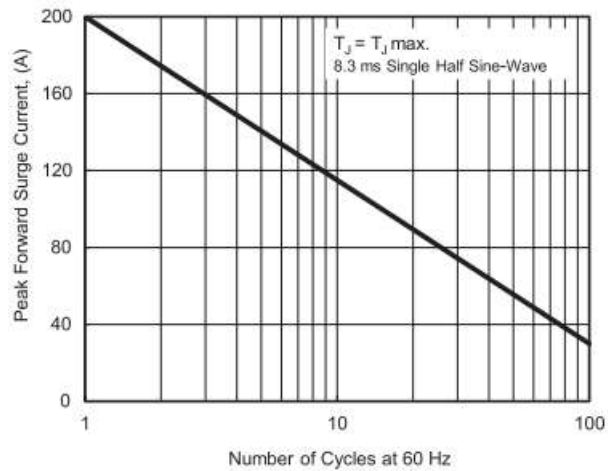


Fig. 2 - Maximum Non-Repetitive Surge Current

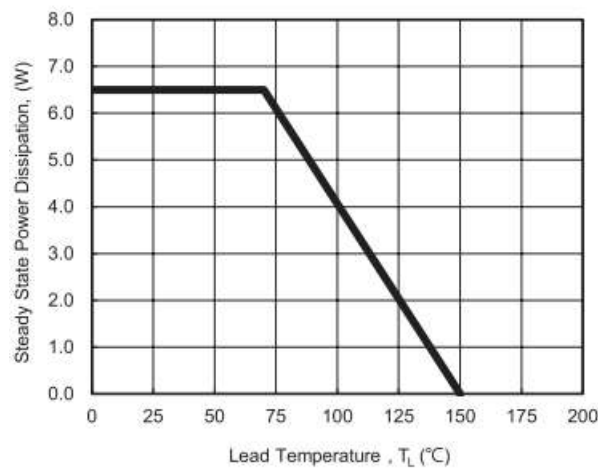


Fig. 3 - Steady State Power Derating Curve

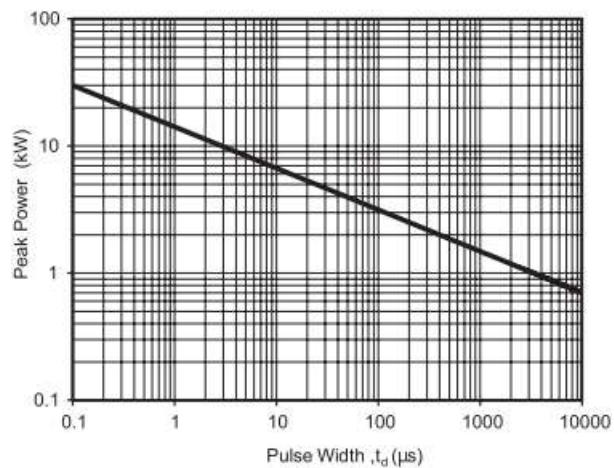


Fig. 4 - Peak Pulse Power Rating Curve

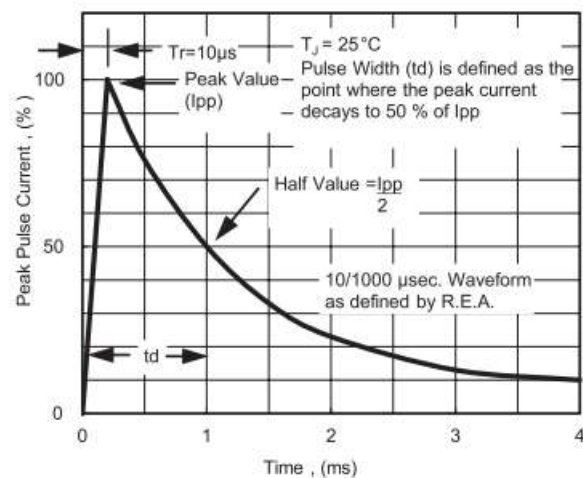


Fig. 5 - Pulse Waveform

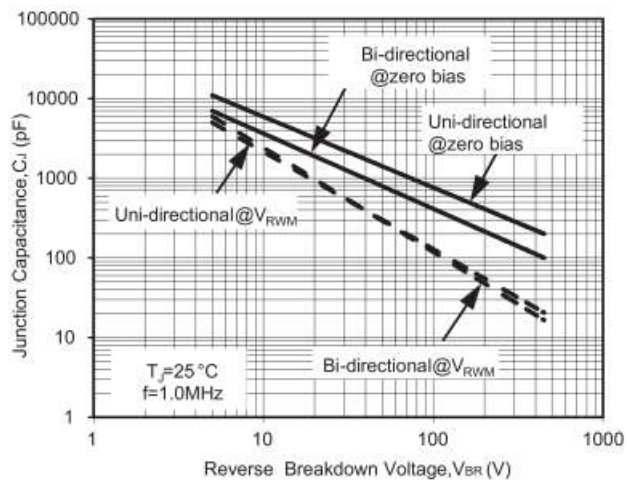



Fig. 6 - Typical Junction Capacitance

# Transient Voltage Suppression Diodes: TPSMCJ Series

## SMD Type 1500 W



### IR-reflow soldering profile

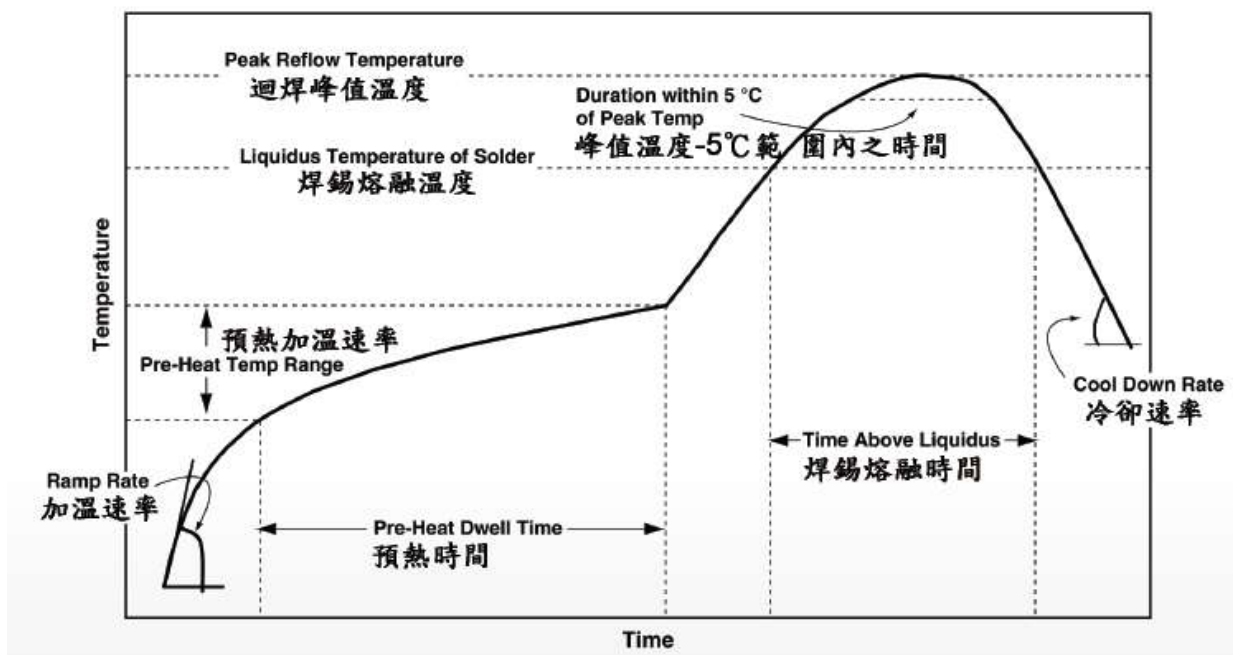


LEAD(Pb)-FREE SOLDER(SnAgCu) REFLOW PROFILE ATTRIBUTES	
PROFILE ATTRIBUTE	PROFILE ATTRIBUTE
Peak Reflow Temperature	250(+10/-5)°C
Time within 5°C of Peak Temperature	30s max
Liquidus Temperature of Solder	217°C
Cool Down Rate	6 °C/s max
Time above Liquidus	60s to 150s
Pre-heat Temperature Range	150°C to 200°C
Pre-heat Dwell Time	60s to 120s
Maximum Ramp Rate	3 °C/s max

# Transient Voltage Suppression Diodes: TPSCMJ Series

## SMD Type 1500 W



### ■ Packaging

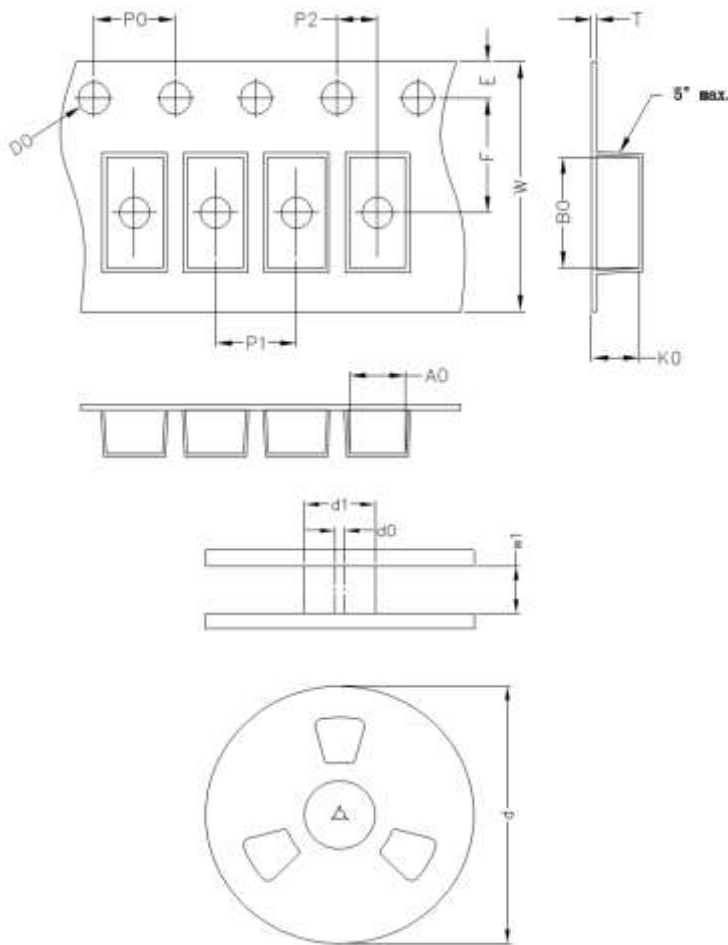

Item	Symbol	DO-214AB (SMC) Unit: mm
Carrier width	A0	6.05
Carrier length	B0	8.31
Carrier depth	K0	2.54
Sprocket hole	D0	1.55
Sprocket hole position	E	1.75
Punch hole position	F	7.50
Sprocket hole pitch	P0	4.00
Carrier pitch	P1	8.00
Embossment center	P2	2.00
Tape thickness	T	0.25
Tape width	W	16.00
Reel outside diameter	d (13")	330.00
Reel inner diameter	d1	75
Feed hole diameter	d0	13.50
Reel inner width	w1	17.00

Note: The tolerance of carrier tape and top cover is  $\pm 0.1$ mm, and the tolerance of reel is  $\pm 2$ mm

### ■ Quantity

Package Type	Reel Size	Reel	Inner Box
	inch	Kpcs	Kpcs
DO-214AB	13	3	6

### ■ Warehouse Storage Conditions of product

- Storage Condition:
  - Storage Temperature: 15~30°C
  - Relative Humidity:  $\leq 75\%RH$
  - Keep away from corrosive atmosphere and sunlight.
- Period of Storage: 1 year.