




Features


- 100W peak pulse power (8/20μs)
- Operating voltage: 3.3V
- Ultra low leakage: nA level
- Ultra low clamping voltage
- Protects one data line
- IEC61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- IEC61000-4-5 (Lightning) 10A (8/20μs)

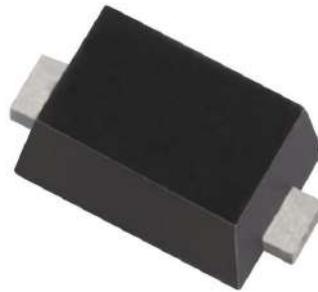


Mechanical Characteristics

- Case: Molded plastic, SOD-523FL
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound
- Moisture Sensitivity: Level 3 per J-STD-020

Pin Configuration

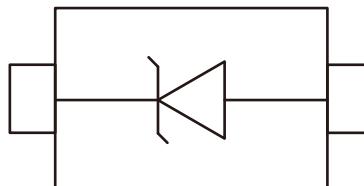

Marking Code

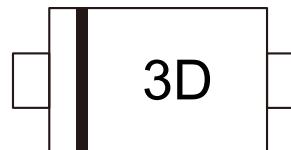

Device Marking Code
= 3D

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Value | Unit |
|--|-----------|-------------|------|
| Peak Pulse Power (tp=8/20μs waveform) | P_{PPM} | 100 | W |
| Peak Pulse Current (tp=8/20μs waveform) | I_{PP} | 10 | A |
| ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact) | V_{ESD} | ±30 ±30 | kV |
| Operating Temperature Range | T_J | -55 to +125 | °C |
| Storage Temperature Range | T_{STG} | -55 to +150 | °C |




YEDSD523R10AU

ESD Protection Diode


Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

| Parameter | Test Condition | Symbol | Min | Typ | Max | Unit |
|-------------------------|--|-----------|-----|-----|-----|---------------|
| Reverse Working Voltage | | V_{RWM} | | | 3.3 | V |
| Breakdown Voltage | $I_T = 1\text{mA}$ | V_{BR} | 3.5 | | | V |
| Reverse Leakage Current | $V_{RWM} = 3.3\text{V}$ | I_R | | | 0.2 | μA |
| Clamping Voltage | $I_{PP} = 1\text{A}$ (8 x 20 μs pulse) | V_C | | | 7 | V |
| Clamping Voltage | $I_{PP} = 10\text{A}$ (8 x 20 μs pulse) | V_C | | | 10 | V |
| Junction Capacitance | $V_R = 0\text{V}$, $f = 1\text{MHz}$ | C_J | | | 70 | pF |


Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

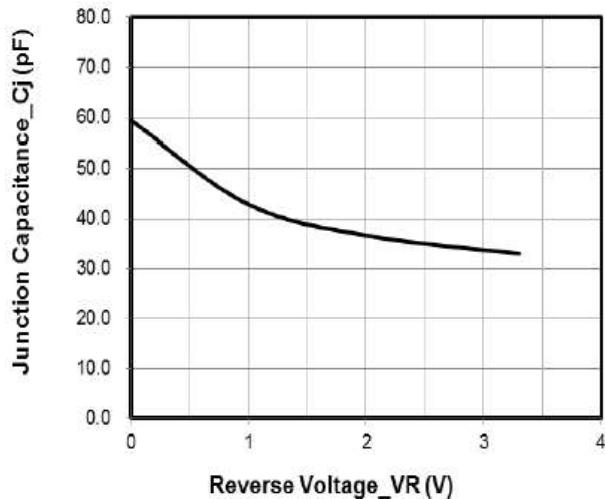


Junction Capacitance vs. Reverse Voltage

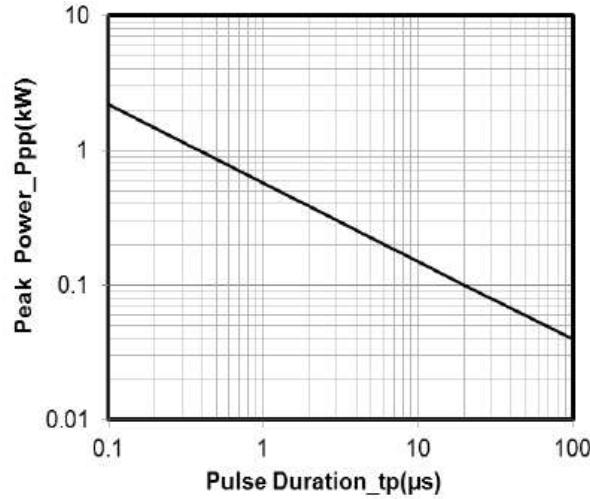


Peak Pulse Power vs. Pulse Time

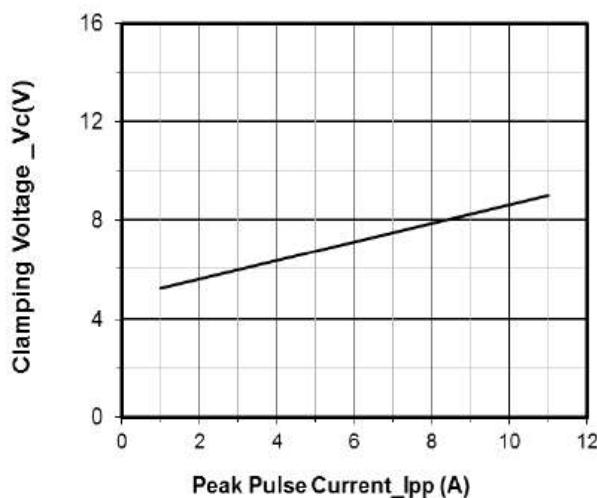


Clamping Voltage vs. Peak Pulse Current

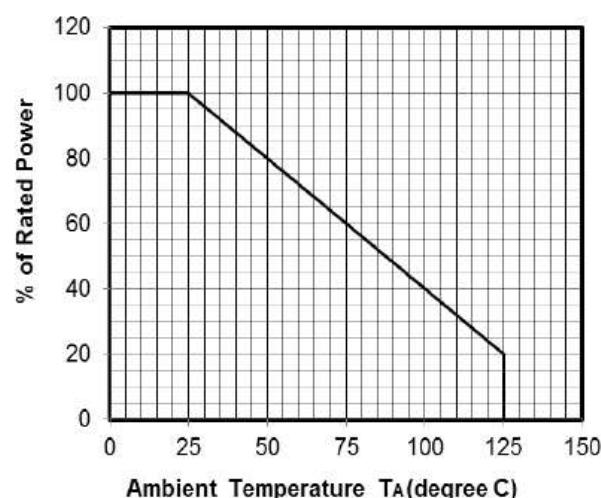

Power Derating Curve

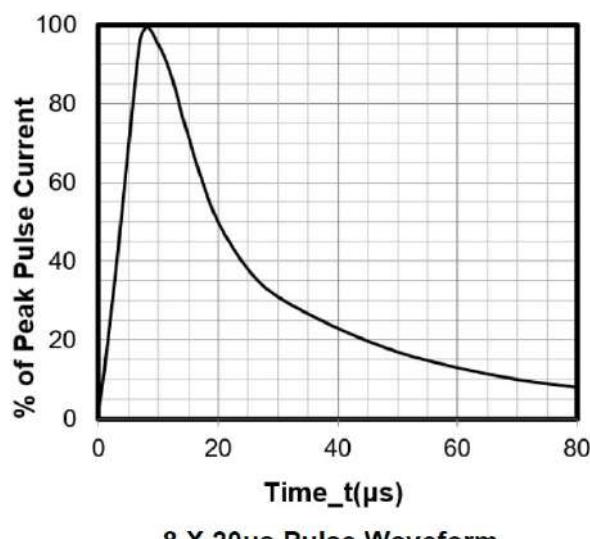

8 X 20 μs Pulse Waveform

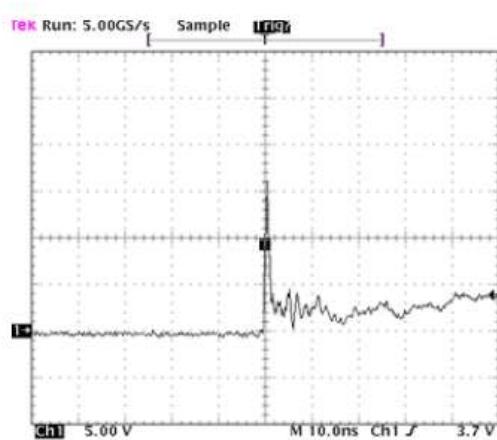


Note: Data is taken with a 10x attenuator

ESD Clamping Voltage

8 kV Contact per IEC61000-4-2




Structures and Dimensions

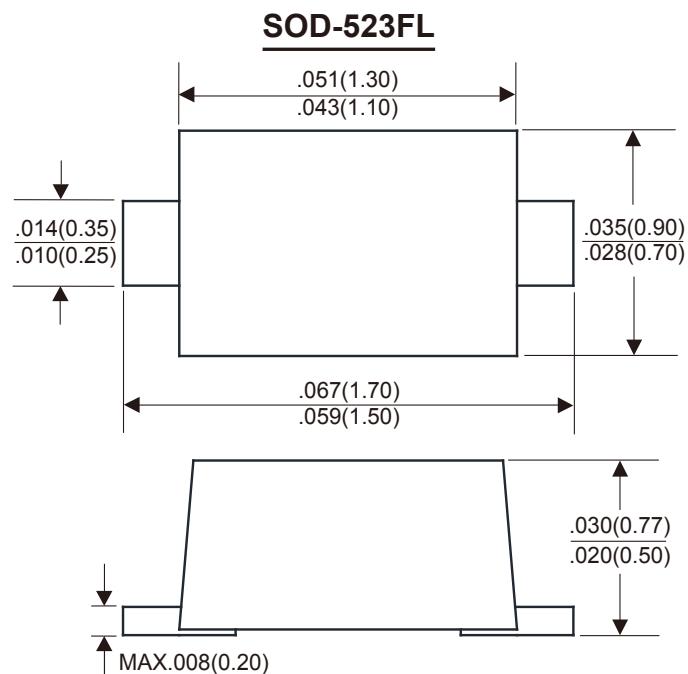

Dimensions in inches and (millimeters)

Recommended Soldering Pad Dimensions

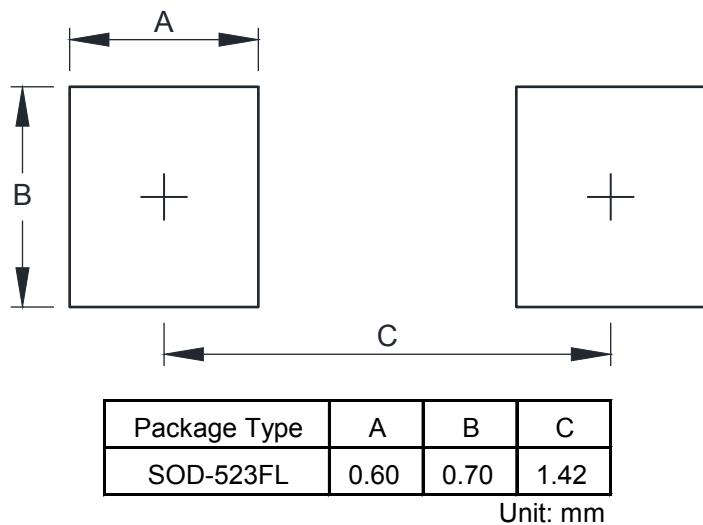

Quantity

| Part Number | Package | Reel Size (inch) | Reel (Kpcs) |
|---------------|-----------|------------------|-------------|
| YEDSD523R10AU | SOD-523FL | 7 | 3 |