

# Data Center Liquid Cooling



THINKING  
SENSOR

Data Center Liquid Cooling



Coolant Distribution Unit



Server Racks




# Platinum Temperature Sensor

## Feature

- High measurement accuracy
- Near-linear resistance–temperature characteristic for easy and reliable measurement
- Robust stainless steel or specified metal housing material
- Platinum element options from PT100 to PT1000
- Customizable sensor materials and thread sizes (BSPP/ NPT/ ISO Metric) to enhance sealing reliability

## Application

Coolant distribution unit of data center, liquid cooling module of energy storage system, liquid-cooled megawatt charging station, HVAC, industrial automation system, and other accuracy-critical or harsh-environment applications

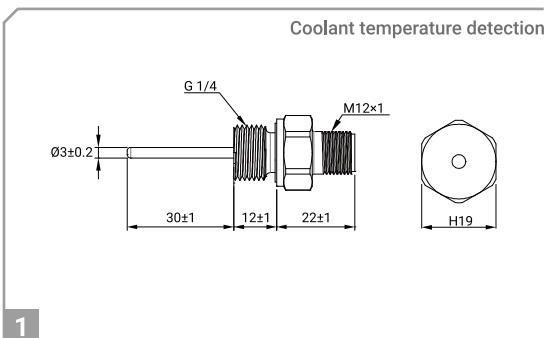

**Feature** | Stainless steel cap with G 1/4" male thread, and M12 connector (4-pin)

**Operating Temperature Range** | -40°C to +150°C

**R Value** |  $R_{0^{\circ}\text{C}} = 1000\Omega$  (Class A)


**Temperature Coefficient of Resistance** | 3850 ppm/K

**Response Time** | Around 3 seconds (in water)

**Insulation Test** | DC 500V 100M $\Omega$  (Min)

**Hi-Pot Test** | AC 1000V 0.5mA (Max)

**Moisture Resistance** | Pass 85°C 85% RH x 1000 hours test

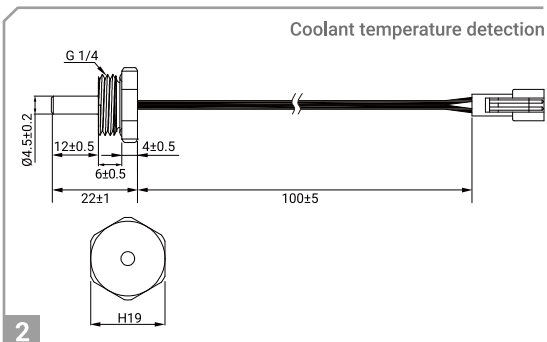

**Feature** | Stainless steel cap with G 1/4" male thread, lead wire, and connector

**Operating Temperature Range** | -40°C to +150°C

**R Value** |  $R_{0^{\circ}\text{C}} = 100\Omega$  (Class A)


**Temperature Coefficient of Resistance** | 3850 ppm/K

**Response Time** | Around 4 seconds (in water)

**Insulation Test** | DC 500V 100M $\Omega$  (Min)

**Hi-Pot Test** | AC 1000V 0.5mA (Max)

**Moisture Resistance** | Pass 85°C 85% RH x 1000 hours test

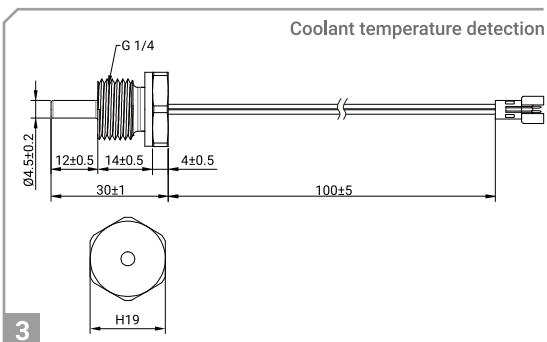

**Feature** | Stainless steel cap with G 1/4" male thread, lead wire, and connector

**Operating Temperature Range** | -40°C to +150°C

**R Value** |  $R_{0^{\circ}\text{C}} = 100\Omega$  (Class A)


**Temperature Coefficient of Resistance** | 3850 ppm/K

**Response Time** | Around 4 seconds (in water)

**Insulation Test** | DC 500V 100M $\Omega$  (Min)

**Hi-Pot Test** | AC 1000V 0.5mA (Max)

**Moisture Resistance** | Pass 85°C 85% RH x 1000 hours test

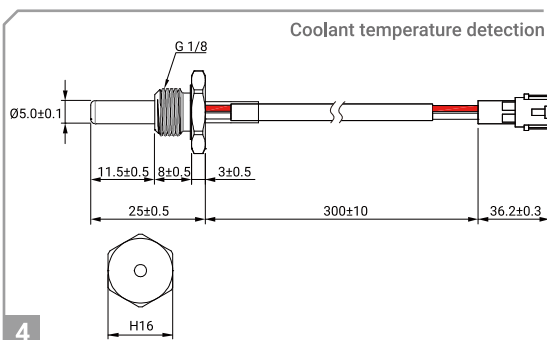

**Feature** | Stainless steel cap with G 1/8" male thread, cable, and connector

**Operating Temperature Range** | -40°C to +150°C

**R Value** |  $R_{0^{\circ}\text{C}} = 1000\Omega$  (Class A)

**Temperature Coefficient of Resistance** | 3850 ppm/K


**Response Time** | Around 4 seconds (in water)

**Insulation Test** | DC 500V 100M $\Omega$  (Min)

**Hi-Pot Test** | AC 1000V 0.5mA (Max)

**Moisture Resistance** | Pass 85°C 85% RH x 1000 hours test

Air or coolant temperature detection

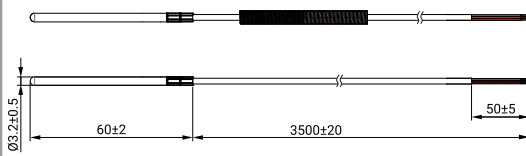

5

**Feature** | Stainless steel tube with cable

**Operating Temperature Range** | -40°C to +150°C

**R Value** |  $R_{0^{\circ}\text{C}} = 1000\Omega$  (Class B)

**Temperature Coefficient of Resistance** | 3850 ppm/K

**Response Time** | Around 3 seconds (in water)

**Insulation Test** | DC 500V 100M $\Omega$  (Min)

**Hi-Pot Test** | AC 1000V 0.5mA (Max)

**Moisture Resistance** | Pass 85°C 85% RH x 1000 hours test

## Platinum Temperature Transmitter


### Feature

- High measurement accuracy
- Near-linear resistance-temperature characteristic for easy and reliable measurement
- Various standardized output signals (e.g., 4–20 mA, 0–10 V) for seamless system integration
- Platinum element options from PT100 to PT1000
- Robust stainless steel or specified metal housing material
- Customizable sensor materials and thread sizes (BSPP/ NPT/ ISO Metric) to enhance sealing reliability

### Application

Coolant distribution unit of data center, liquid cooling module of energy storage system, liquid-cooled megawatt charging station, HVAC, industrial automation system, and other accuracy-critical or harsh-environment applications

Coolant temperature detection

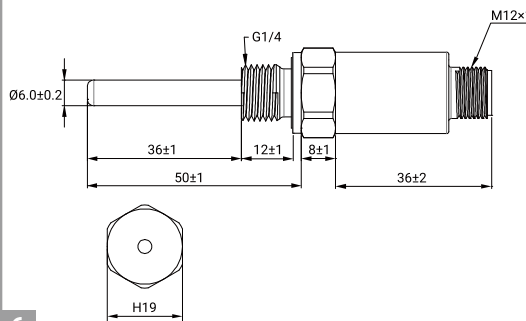

6

**Feature** | Stainless steel housing with G 1/4" male thread, and M12 connector (4-pin)

**Operating Temperature Range** | -40°C to +150°C

**R Value** |  $R_{0^{\circ}\text{C}} = 100\Omega$  (Class A)

**Temperature Coefficient of Resistance** | 3850 ppm/K

**Response Time** | Around 6 seconds (in water)


**Output Signal** | 4 mA to 20 mA

**Insulation Test** | DC 500V 100M $\Omega$  (Min)

**Hi-Pot Test** | AC 500V 5 mA (Max)

**Moisture Resistance** | Pass 85°C 85% RH x 1000 hours test

Coolant temperature detection

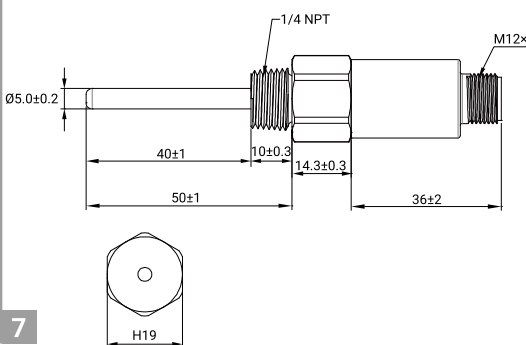

7

**Feature** | Stainless steel housing with 1/4" NPT male thread, and M12 connector (4-pin)

**Operating Temperature Range** | -40°C to +150°C

**R Value** |  $R_{0^{\circ}\text{C}} = 100\Omega$  (Class A)

**Temperature Coefficient of Resistance** | 3850 ppm/K

**Response Time** | Around 4 seconds (in water)

**Output Signal** | 4 mA to 20 mA

**Insulation Test** | DC 500V 100M $\Omega$  (Min)

**Hi-Pot Test** | AC 500V 0.5mA (Max)

**Moisture Resistance** | Pass 85°C 85% RH x 1000 hours test